


UAAS V2.0 Stand Disassembly & Installation

Use a 4mm L-shaped hex key to remove the two screws marked with red circles.



During disassembly, please note that the ABS spacers inside the red-circled area may come loose. Be careful not to lose them.

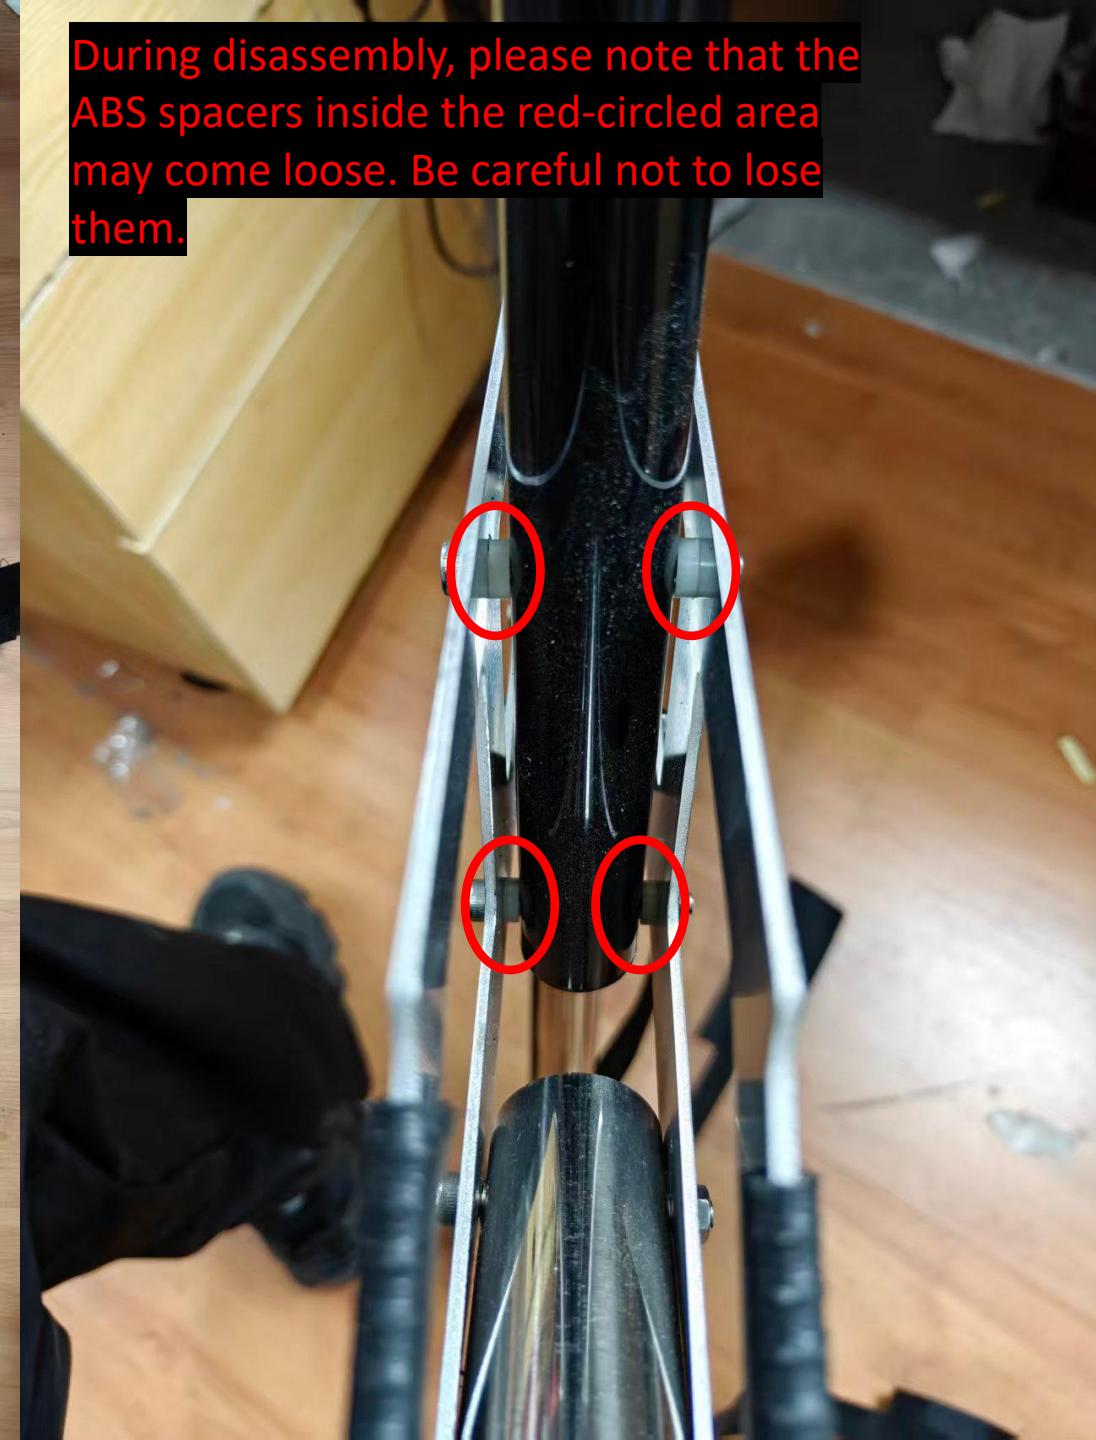

Before installation, prepare the following items shown in the image:

M5 × 40
socket head
cap screw

M5 standard
nut

ABS spacers

mm L-shaped
hex key



At the red-circled position, install:

- 1 × M5 × 40 socket head cap screw
- 1 × M5 standard nut
- 2 × ABS spacers



Assembly order from top to bottom:

Metal plate → ABS spacer → PVC tube → ABS spacer
→ Metal plate



